
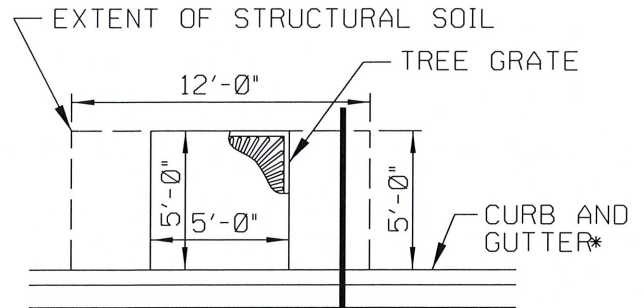


TREE ANCHOR LAYOUT PLAN

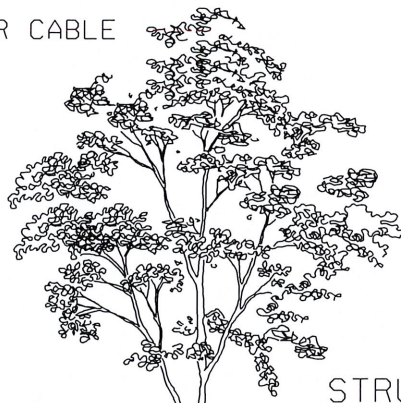

STRUCTURAL SOIL PLAN * STRUCTURAL SOIL 5' X 12' CENTERED ON TREE

CUT AND REMOVE ALL WIRE, ROPE AND BURLAP FROM TOP OF ROOT BALL

SHREDDED PINE BARK MULCH

2'-6"

5'-0"

ROOT BALL

TREE GRATE RE: STD 832 & 833

SIDEWALK OR BRICK PAVERS

STRUCTURAL SOIL AT TREES SEE STRUCTURAL SOIL PLAN FOR EXTENTS COMPACT TO 95% RE: SPECS

IRRIGATION LINES, BURY 18" MIN.

COMPACTED BASE

ANCHOR CABLE

GROUND ANCHOR

4" PVC DRAINAGE LINE WITH FABRIC SOCK
SLOPE PIT 1% TO DRAINAGE LINE.
DRAIN TO BE PERFORATED IN TREE PIT ONLY,
LINE BETWEEN PITS TO BE SOLID.

NOTE:

1. EXCAVATE STRUCTURAL SOIL AS REQUIRED TO ACCOMMODATE TREE ROOT BALL.
2. GROUND ANCHORS EQUAL TO DUCKBILL EARTH ANCHORS MODEL #88 RBK STRAP. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
3. TREE GROUND ANCHORS TO BE DRIVEN TO DEEPEST POSSIBLE DEPTH (MINIMUM DEPTH OF 42").

TREE WELL WITH GRATE

CITY OF TULSA, OKLAHOMA
ENGINEERING SERVICES DEPARTMENT

DRAWN BY: R.M.O.
CHECKED BY: *HAJ*
DATE: MARCH 2022

APPROVED
[Signature]

NOT TO SCALE

STANDARD NO. 834