


DRIVEWAY SECTION

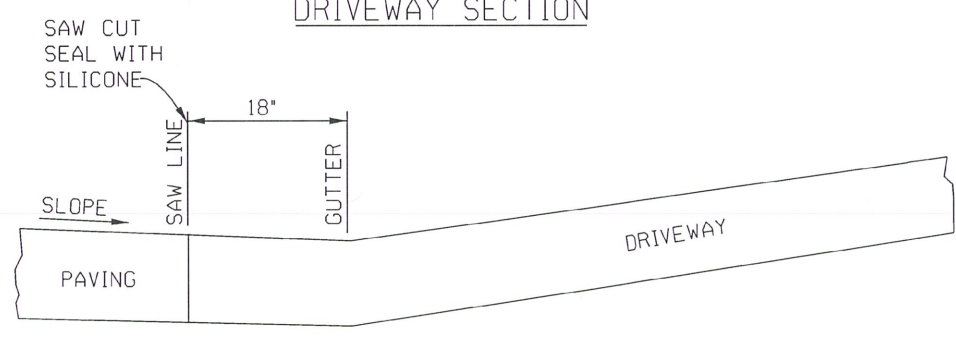

SECTION AT GUTTER

- ALL SAW CUT, EXPANSION JOINTS, AND CONTRACTION JOINTS, IN DRIVEWAY SHALL BE SEALED WITH LOW MODULUS SILICON JOINT SEALER THAT MEETS ODOT 701.08
  - PROVIDE 5'X5' SIDEWALK PANEL AT DRIVEWAYS, OR EVERY 200' MAXIMUM
  - MAXIMUM 24' DRIVEWAY, WIDTH GREATER THAN 24' REQUIRES APPROVAL BY THE ZONING CODE
  - COMPACTION OF AGGREGATE BASE SHALL BE ACCORDING TO CITY OF TULSA STANDARD
- SIDEWALKS AND RAMPS SHALL MEET THE ADA ACCESSIBILITY TECHNICAL REQUIREMENTS AS SHOWN AT [WWW.ACCESS-BOARD.GOV/PROWAG/](http://WWW.ACCESS-BOARD.GOV/PROWAG/)

RESIDENTIAL CONCRETE DRIVEWAY ASPHALT STREET	
CITY OF TULSA, OKLAHOMA PUBLIC WORKS DEPARTMENT	
DRAWN BY: D.J.N. CHECKED BY: DATE: OCTOBER 2023	APPROVED <i>[Signature]</i>
NOT TO SCALE	STANDARD NO. 702

PATH NAME: /E1/PARTS/STD/DGN.STDS/702-RES-CONC-DRV-ASPH-STR.DGN DJN 10/11/2023