


STREET NAME SIGN INSERT DETAIL (WHERE REQUIRED)

- NOTES:  
 1) TO BE USED FOR ALL STREET NAME SIGN INSTALLATIONS, WITH OR WITHOUT OTHER TRAFFIC SIGNS.  
 2) STREET NAME SIGNS SHALL NOT BE ATTACHED DIRECTLY TO 1-3/4" POST.  
 3) HAMMER-BEND ALL BOLTS AFTER INSTALLATION (EXCEPT FOOTING SLEEVE) TO PREVENT UNAUTHORIZED REMOVAL OF SIGNS AND INSERT.  
 4) FOR SIGN LENGTHS 30" AND OVER, ENDS SHALL BE PINCHED-BOLTED USING #10-24 x 1/2" PHILLIPS/SLOTTED PAN HEAD BOLT, NUT, AND 2 WASHERS.

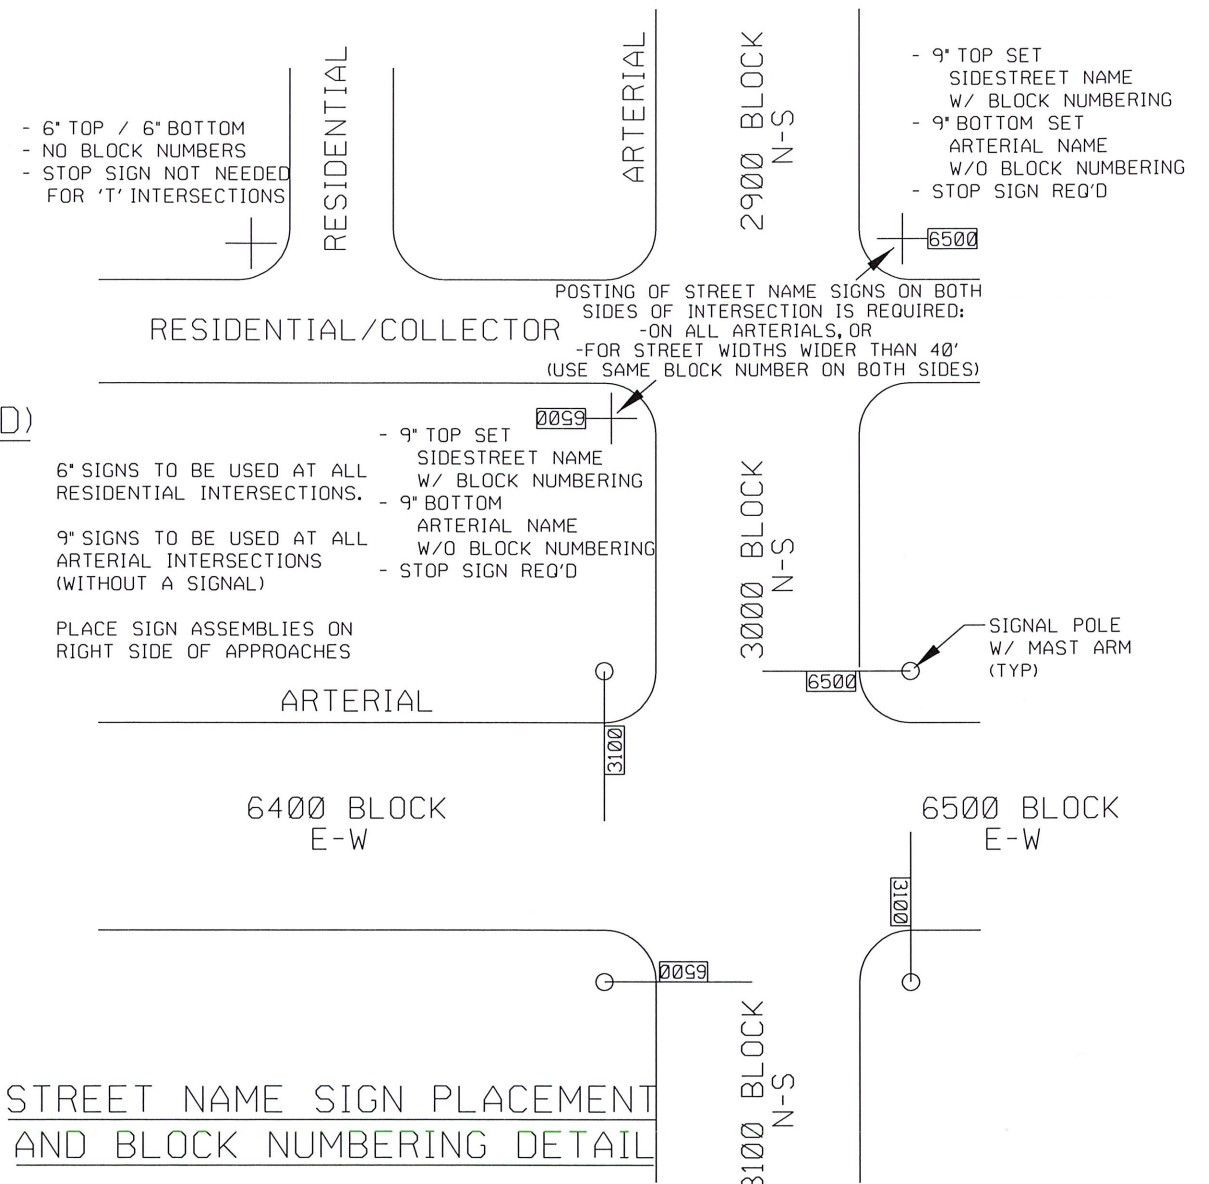

STREET NAME SIGN PLACEMENT AND BLOCK NUMBERING DETAIL

SHOWS TYPICAL INSTALLATIONS  
 CONTRACTOR SHALL INSTALL BASED ON PLANS

SIGN INSTALLATION DETAIL

SIGN PAY ITEM TABLE

| PAY ITEM | DESCRIPTION      | UNIT | USE FOR:                                 |
|----------|------------------|------|--|
| 608(A)   | GROUND SIGN      | S.F. | POST-MOUNTED TRAFFIC / STREET NAME SIGNS |
| 608(B)   | OVERHEAD SIGN    | S.F. | MAST-ARM MOUNTED SIGNS                   |
| 608(C)   | 1-1/2" SIGN POST | L.F. | STREET NAME SIGN INSERT                  |
| 608(D)   | 1-3/4" SIGN POST | L.F. | MAIN SIGN POST                           |
| 608(E)   | 2" SIGN POST     | L.F. | FOOTING SLEEVE                           |

| REVISION | BY | DATE |
|----------|----|------|
|          |    |      |
|          |    |      |
|          |    |      |

CITY OF TULSA, OKLAHOMA  
 ENGINEERING SERVICES DEPARTMENT

TRAFFIC SIGNS

DATE: MARCH 2022

STD. 608B